


Ysc450 系列施工升降机 Series Builder Hoist

产品特点

- 模块化设计，可以方便地组成不同的机型
- 采用高强度结构钢制造，结构轻巧
- 主要结构件热浸镀锌，延长使用寿命
- 变频调速控制系统，启动与制动非常平稳，启动电流低，对设备的损耗小
- 采用齿轮减速传动，高效节能
- 多种吊笼门供选择，满足不同的需求
- 标准节规格为450×450×1508mm，采用中置齿条，齿条模数为5

Features

- Modular design, easy to make different combinations according to requirement
- Adopting high quality steel for higher strength and lighter weight
- Main components are hot dip galvanized to guarantee longer lifetime
- With frequency control, starting and stopping is very smooth, low starting current, small wear
- Using high efficiency helical gear box, lower power consumption and operation cost
- With many different models of cage door available
- The mast section type is 450×450×1508mm, use centrally located rack. The rack modulus is 5mm

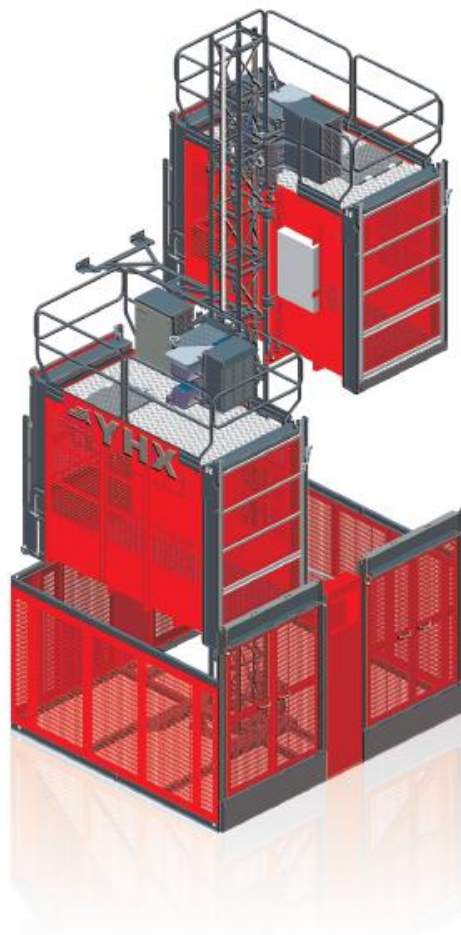

技术参数表

Technical data sheet

型号 Model	额定载重 Payload kg	提升速度 Speed m/min	电机功率 Motor power kw	变频器功率 Inverter power kw
SC100 SC100/100	1000	0-35	2×9.5	22
		0-46	2×13	30
		0-54	2×16	37
SC140 SC140/140	1400	0-35	2×13	30
		0-46	2×16	37
		0-54	2×16	37
SC200 SC200/200	2000	0-35	2×13	30
		0-46	2×20	45
		0-54	2×20	45

备注：


吊笼尺寸规格（长×宽×高）（m）：3.0×1.4×2.0，2.4×1.4×2.0；
也可以根据用户的要求定制。

Remark:

Cage size (L×W×H)(m): 3.0×1.4×2.0, 2.4×1.4×2.0;
We can also design other cage sizes on user's request.



Ysc450 标准节
Mast section

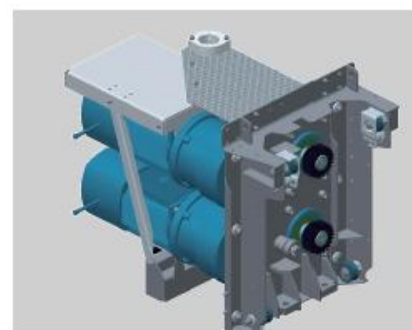

Ysc450 驱动单元
Drive unit



Ysc450 防坠器
Safety device


Ysc650A 系列施工升降机 Series Builder Hoist

产品特点

- 模块化设计，可以方便地组成不同的机型
- 采用高强度结构钢制造，结构轻巧
- 主要结构件热浸镀锌，延长使用寿命
- 变频调速控制系统，启动与制动非常平稳，启动电流低，对设备的损耗小
- 采用齿轮减速传动，高效节能
- 多种吊笼门供选择，满足不同的需求
- 标准节规格为650×650×1508mm，采用中置齿条，齿条模数为5mm

Features


- Modular design, easy to make different combinations according to requirement
- Adopting high quality steel for increased strength and weight reduction
- Main components are hot dip galvanized which guarantee longer lifetime
- With frequency control, starting and stopping is smooth, low start-up current, small wear
- Using high efficiency helical gear box, lower power consumption and operation cost
- With many different models of cage door available
- The mast section type is 650×650×1508mm, use centrally located rack. The rack modulus is 5mm

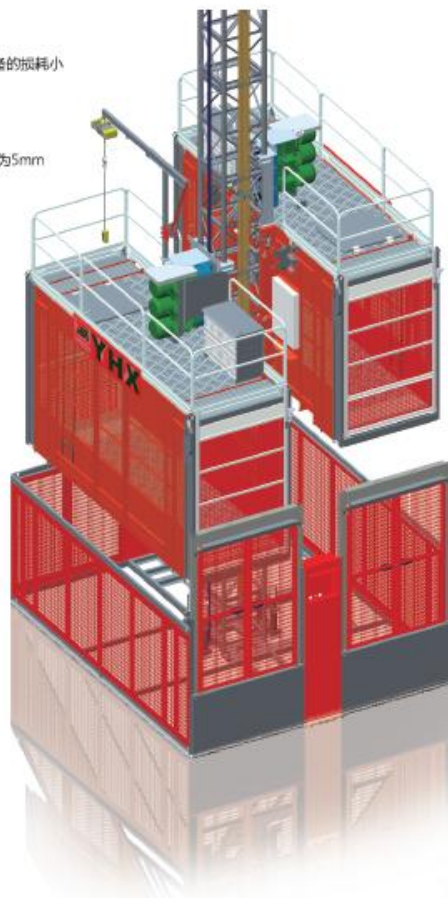

技术参数表

Technical data sheet

型号 Model	额定载重 Payload kg	提升速度 Speed m/min	电机功率 Motor power kw	变频器功率 Inverter power kw
SC100 SC100/100	1000	0-35	2×9.5	22
		0-46	2×13	30
		0-54	2×16	37
		0-96	3×20	75
SC200 SC200/200	2000	0-35	2×13	30
		0-46	2×20	45
		0-54	2×20	45
		0-96	3×28	110
SC250 SC250/250	2500	0-35	2×16	37
		0-46	3×16	55
		0-54	3×16	55
		0-96	3×32	110
SC300 SC300/300	3000	0-35	2×20	45
		0-46	3×20	75
		0-54	3×20	75
		0-96	3×35	132

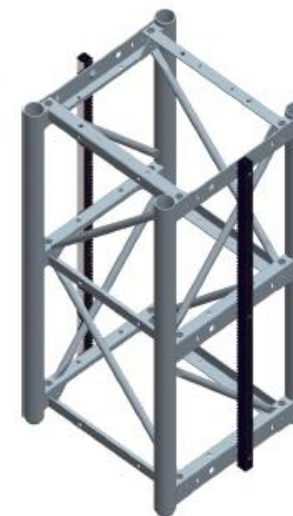

Ysc650A 标准节
Mast section

备注：

吊笼尺寸规格（长×宽×高）（m）：3.2×1.5×2.3/2.0，3.9×1.5×2.3/2.0，4.6×1.5×2.3/2.0；
也可以根据用户的要求定制。

Remark:

Cage size (L×W×H)(m): 3.2×1.5×2.3/2.0, 3.9×1.5×2.3/2.0, 4.6×1.5×2.3/2.0;
We can also design other cage sizes on user's request.



Ysc650A 防坠器
Safety device

Ysc650B 系列施工升降机 Series Builder Hoist

产品特点

- 直接自动控制
- 结构简单、成本低，安装、拆卸、维护方便
- 主要结构件可选择油漆或者热镀锌
- 采用蜗轮蜗杆减速传动
- 可根据用户需要，附带驾驶室
- 标准节规格为650×650×1508mm，采用偏置齿条，齿条模数为8mm

Features

- Direct start control
- Simple structure and low cost. It is easy to install, dismantle and maintenance
- Main components can choose paint or hot dip galvanizing
- Using worm gear reducer
- Operator cab can be provided on the customer's request
- The mast section type is 650×650×1508mm, use off-center located rack. The rack modulus is 8mm



Ysc650B
安全装置
Safety device

技术参数表

Technical data sheet


型号 Model	额定载重 Payload kg	提升速度 Speed m/min	电机功率 Motor power kw	吊笼尺寸 Cage size (L×W×H)m
SC100 SC100/100	1000	35	2×9.5	3.2×1.5×2.3
SC150 SC150/150	1500	35	2×13	
SC200 SC200/200	2000	35	3×11	

备注：

需要特殊设计，请与裕华兴联系。

Remark:

Need special design, please contact YHX.

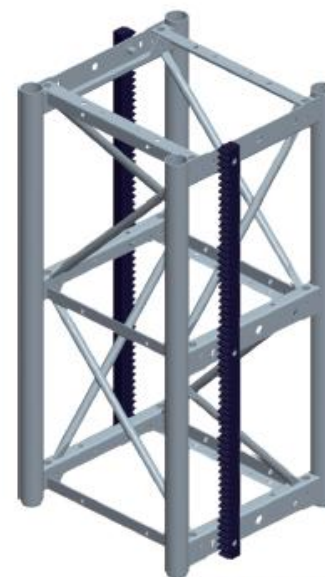

Ysc650B 标准节
Mast section



Ysc650B 驱动单元
Drive unit



Ysc650B 驾驶室
Operator cab


Ysc650A 系列双柱施工升降机 Series Twin Mast Builders Hoist

产品特点

- 适用于大体积、大重量货物的运输
- 变频调速控制系统
- 采用齿轮减速传动
- 可提供多种吊笼门供选择，满足不同的需求
- 标准节规格为650×650×1508mm，齿条模数为5mm

Features

- Apply to vertical transport of super volume or heavy duty goods
- With frequency control
- Using high efficiency helical gear box
- Multiple choices of doors
- The mast section type is 650×650×1508mm, use centrally located rack. The rack modulus is 5mm

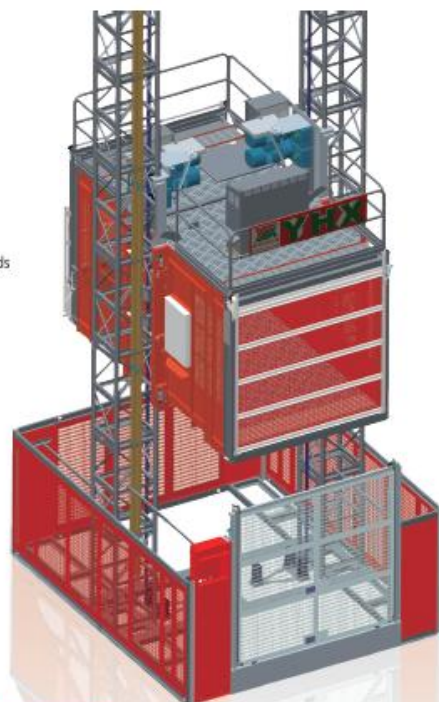

技术参数表 Technical data sheet

型号 Model	额定载重 Payload kg	提升速度 Speed m/min	电机功率 Motor power kw	变频器功率 Inverter power kw
SCE200	2000	0-46	2×2×16	2×37
SCE300	3000	0-35	2×2×13	2×30
SCE400	5000	0-35	2×2×16	2×37
SCE500	6000	0-35	2×2×20	2×45

备注：

吊笼尺寸规格（长×宽×高）（m）：4.6×2.5×2.3；
也可以根据用户的要求定制。

Remark:

Cage size (L×W×H)(m): 4.6×2.5×2.3 ;
We can also design other cage sizes on user's request.


YSCH650 系列货用施工升降机 Series Material Hoist

产品特点

- 地面或楼层内无线遥控操作升降运行，通过设定，自动停层
- 模块化组合结构，便于安装、拆卸及运输
- 吊笼尺寸及其他参数可根据用户需求设计，并可采用双笼型

Features

- Remote control or automatic landing control
- Modular design, it is easy to install, dismantle and transported
- Customer can choose other cage sizes and parameters.
The hoist can be set up with dual cages

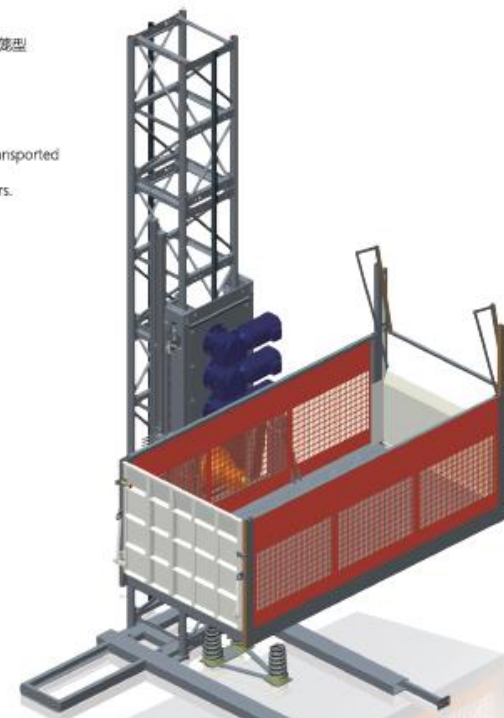

技术参数表 Technical data sheet

型号 Model	额定载重 Payload kg	提升速度 Speed m/min	电机功率 Motor power kw	吊笼尺寸 Cage size (L×W×H)m
SCH100	1000	0-30	2×9.5	3.2×1.5×1.1
SCH200	2000	0-30	2×11	
SCH300	3000	0-30	3×9.5	

可选部件 SELECTABLE PARTS

标准节 Mast section



450×450×1508
YSC450 mast section
齿条模数m=5
Rack modulus m=5



650×650×1508
YSC650A mast section
齿条模数m=5
Rack modulus m=5



650×650×1508
YSC650B mast section
齿条模数m=8
Rack modulus m=8



650×200×1508
YSC650A mast section
齿条模数m=5
Rack modulus m=5

吊笼门 Cage door



单开门1
Entrance door 1
Vertical full height
entrance door



双开门1
Exit door 1
Vertical exit door
in two parts



单开门2
Entrance door 2
Vertical full height
"slim" entrance door,
The frame profile of
door leaf is steel tube



双开门2
Exit door 2
Vertical "slim" exit
door in two parts,
The frame profile of
door leaf is steel tube

电缆导向装置 Cable guiding device



电缆桶
Cable basket



电缆滑轮
Cable pulley
(with separate guide rail)



电缆小车
Cable trolley
(climbing along the mast)




滑触线
Conductor bar system



单开门3
Entrance door 3
Vertical full height
"slim" entrance door,
The frame profile of door
leaf is aluminum alloy



双开门3
Exit door 3
Vertical "slim" exit door
in two parts,
The frame profile of door
leaf is aluminum alloy

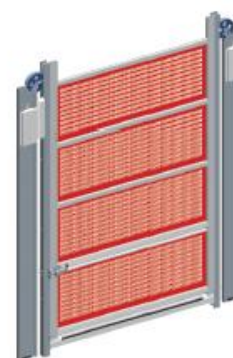

侧开门
Side door



手动或液压翻板门
Exit door with manual or
hydraulic folding load ramp

可选部件 SELECTABLE PARTS

附墙架 Mast tie



YSC450 附墙架 I
mast tie I



YSC450 附墙架 III
mast tie III



YSC450 附墙架 IV
mast tie IV



YSC650 附墙架 I
mast tie I



YSC650 附墙架 II
mast tie II



YSC650 附墙架 III
mast tie III



YSC650 附墙架 IV
mast tie IV



YSC650 附墙架 V
mast tie V

楼层门 LANDING DOOR




楼层门1
Landing door 1
(With electrically interlocked)



楼层门2
Landing door 2
(With electrically interlocked)



楼层门3
LANDING DOOR 3
(With mechanically and electrically interlocked)

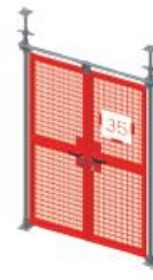

楼层门4
Landing door 4
(With electrically interlocked)

自动平层系统 Automatic landing system

利用控制单元以及编码器进行自动控制，使用数字键盘经过简单的设定后，可以让升降机准确的停在预定的楼层，使升降机的操作极为简便。

Using control unit and encoder for automatic control, the hoist may accurately stop at the target floor by some simple set, the hoist operation is very simple.



可选部件 SELECTABLE PARTS

YHX 在世界各地
in worldwide

楼层呼叫系统

当某一层有楼层呼叫时，楼层呼叫显示器上对应的指示灯亮，并有声音提示，司机根据指示灯及声音提示可以知道哪一层有呼叫。解决了建筑工人和升降机操作人员的通讯问题，降低了施工升降机的安全隐患，极大的提高了升降机的使用效率。

Floor calling system


When one floor calling, the indication light on the receiver display is on and give a voice prompts, the operator can know which floor is calling. That solves the communication problems between workers and operators, reducing the security risks, greatly improves the efficiency of hoist.

特点

- 采用高频无线通讯方式，接线少、安装方便。
- 当有楼层呼叫时，吊笼内的接收显示器会有相应的数字显示，并有语音提示。
- 采用编码和解码技术，每个呼叫器都有唯一的编码，呼叫器之间不会产生干扰。

Features

- Using high-frequency wireless communication, less wiring, easy installation.
- The receiver display has a corresponding LED indicates for each floor call, and the same time, the receiver give a voice prompts
- Using encoding and decoding technology, each pager has a unique code, there will not occur interference between the pager.

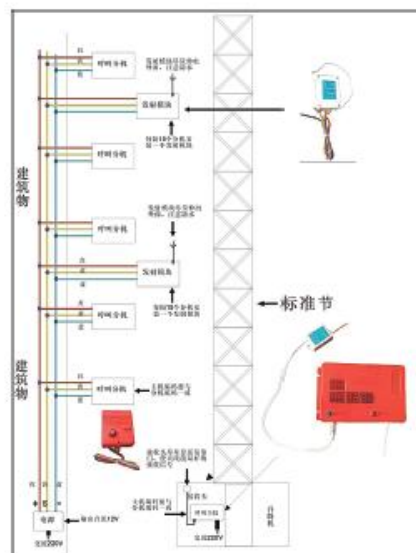

广州 GUANGZHOU



深圳 SHENZHEN



湛江 ZHANJIANG



台湾 TAIWAN



泰国 THAILAN



新加坡 SINGAPORE



菲律宾 PHILIPPINES



缅甸 BURMA



马来西亚 MALAYSIA



以色列 ISRAEL



印度 INDIA



卡塔尔 QATAR

YUHUAXING



QUALITY

GUANGDONG
YUHUAXING
CONSTRUCTION
MACHINERY
MANUFACTURE
CO.,LTD.

YHX



SAFETY



广东裕华兴建筑机械制造有限公司成立于1997年3月，系专业从事建筑机械研发设计、生产、销售和租赁的民营企业，且是中国工程机械工业协会装修与高空作业机械分会理事单位和广东省标准化协会会员。

主要产品有施工升降机、爬升式工作平台、伸缩式卸料平台、高处作业吊篮、擦窗机等。

产品销售与租赁并举是公司的基本市场战略，有效地树立了“裕华兴”品牌，并提供了稳定的现金流。一方面，将自主研发生产的施工升降机、爬升式工作平台、伸缩式卸料平台、吊篮等标准化产品推向德国、瑞典、澳大利亚、马来西亚、新加坡、印度等国外市场；另一方面，大力拓展施工升降机、伸缩式卸料平台、吊篮等产品的租赁业务；目前，我们已在广州、北京和上海等地设有租赁分公司。另外，针对不同客户的需求，公司也积极开展擦窗机系统、钢铝模板等非标准建筑机械和金属构件的设计生产和销售等业务。

Guangdong Yuhua Xing Construction Machinery Manufacture Co., Ltd., established in March 1997, is a private enterprise specializing in R&D, designing, manufacturing, selling and leasing of construction machinery. It is the council unit of Decoration and Aerial Work Machinery Branch of China Engineering Machinery Industry Association and a member of Guangdong Standardization Association, mainly producing builder hoist, mast climbing work platform, superdeck loading platform, temporary suspended platform, building maintenance unit etc.

Taking product sale and leasing as the basic market strategy, the company has effectively built "Yuhua Xing" and provided steady cash flow. On one hand, it pushes the independently developed builder hoist, mast climbing work platform, superdeck loading platform, suspended platform and other standardization products to Germany, Sweden, Australia, Malaysia, Singapore, India, etc.; on the other hand, it energetically expands leasing business of builder hoist, superdeck loading platform, suspended platform and other products. Till now, we have established leasing branches in Guangzhou, Beijing, Shanghai and etc. Besides, according to the different requirements of customers, our company actively develops design, production, sale and other business of building maintenance system, steel aluminum shuttering and other non-standard building machinery and metal parts.